



BUILT TO WORK THE WAY YOU WORK

- **380** BUSHEL CAPACITY
- **HEAVY DUTY PINTLE CHAIN (WITH CHAIN LUBRICATION SYSTEM)**
- **DIRECT DRIVE VERTICAL BEATERS**
- **METERING GUILLOTINE ENDGATE**
- **WEIGH SCALE INSTALLATION READY**
- **FLARED SIDES WITH OPTIONAL SIDE EXTENSIONS**
- **CLUTCH PROTECTED DRIVELINES (SLIP/OVER-RUN)**
- **QUICK DETACH BEATERS**
(INTERCHANGEABLE FOR COMPOST OR VERTICAL BEATERS)




PROUDLY MADE IN THE USA





BUILT TO WORK THE WAY YOU WORK

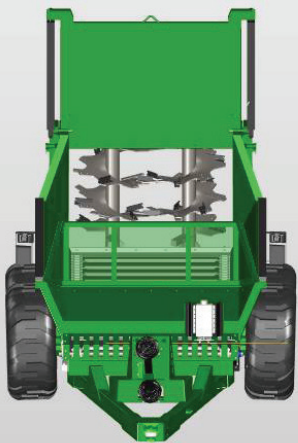

Efficient


- VERTICAL BEATERS PROVIDE A WIDE AND CONSISTENT SPREAD PATTERN
- HYDRAULIC METERING END GATE CONTAINS FREE FLOWING MATERIAL
- ADJUSTABLE APRON SPEED (0-16 FT. PER MIN.)

Durable

- HEAVY DUTY WALKING BEAMS (8-BOLT) X 4 HUBS
- WH124 PINTLE CHAIN RATED UP TO COMBINED 120,000 LBS
- SPRING LOADED TAKE-UP BEARINGS ALLOW FOR CHAIN FLEX WITHOUT DAMAGE

Operator Friendly

- ALL BEARINGS HAVE EASY ACCESS GREASE FITTING BANKS
- SLOPED SIDES ALLOW FOR EASIER LOADING
- ROAD SAFETY AND FIELD WORK LIGHTS OPTIONAL
- AVAILABLE IN TRADITIONAL GREEN, INDUSTRIAL YELLOW, RED OR BLUE



Capacity	380 BUSHEL
Struck Level ASAE S324.1	276 CUBIC FT.
Heaped ASAE S324.1	427 CUBIC FT.
Load carrying capacity	11.5 TONS
Inside width of box	83.5 IN.-65 IN.
Depth of box	28.5 IN.
Overall width w/flotation tires (tire size 500/50-22.5)	115 IN. (RADIAL TIRES)
Overall height (gate closed)	99 IN.
Loading height	67.75 IN.
Overall length	27 FT. 4 IN.
Bed length	218 IN.
Number of beaters	2
Beater speed	420 RPM.
Fan diameter	34.6 IN.
Number of paddles on beaters	36 TOTAL
Tractor PTO hp min. recommended	100 HP.
Number of unloading speeds	INFINITE FROM 0-15.21 FT./MIN.
PTO speed	1000
PTO shaft diameter	1-3/8 or 1-3/4 IN. AVAILABLE
Number of end gate cylinders	2
Tare weight	12,000 LBS.

60 Pik Rite Lane Lewisburg, PA 17837 (570) 523-8174

For more information: Call: 1-800-326-9763 Email: sales@pikrite.com www.pikrite.com

PROUDLY MADE IN THE USA

