



2" Pressure Relief Valve Setting Instructions



①

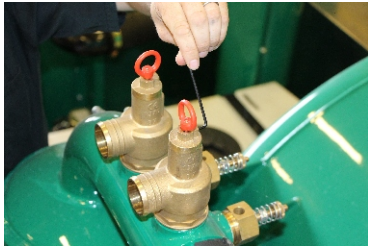

②

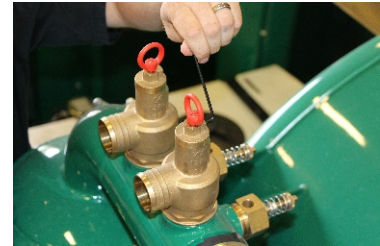

③

Picture 1

Loosen the stop set screw to allow the upper ring to be adjusted.

Picture 2

Once the stop set screw is loose, turn the upper ring clockwise to increase pressure or counter clockwise to decrease pressure.

Picture 3

When the desired pressure is achieved, line up the arrow on the flat side of the shaft with the set screw. Replace the set screw and tighten so the upper ring is secure.

Recommended Pressure Setting: 10 PSI

ATTENTION: When setting is complete, verify that the stem can only slide vertically. DO NOT REPLACE the set screw with other types or blocking systems. Use only Metaltecnica parts.



BUILT TO WORK THE WAY YOU WORK!

60 Pik Rite Lane
Lewisburg, PA 17837

Call 800-326-9763 to talk to one of our parts experts today!
Hours: Monday through Friday, 8 AM to 5 PM, Eastern Time Zone